Roof Report


Prepared by Roofr

7805 71 Street Northwest, Edmonton, AB T6B 3V6

18199 sqft

56 facets


Predominant pitch 4/12

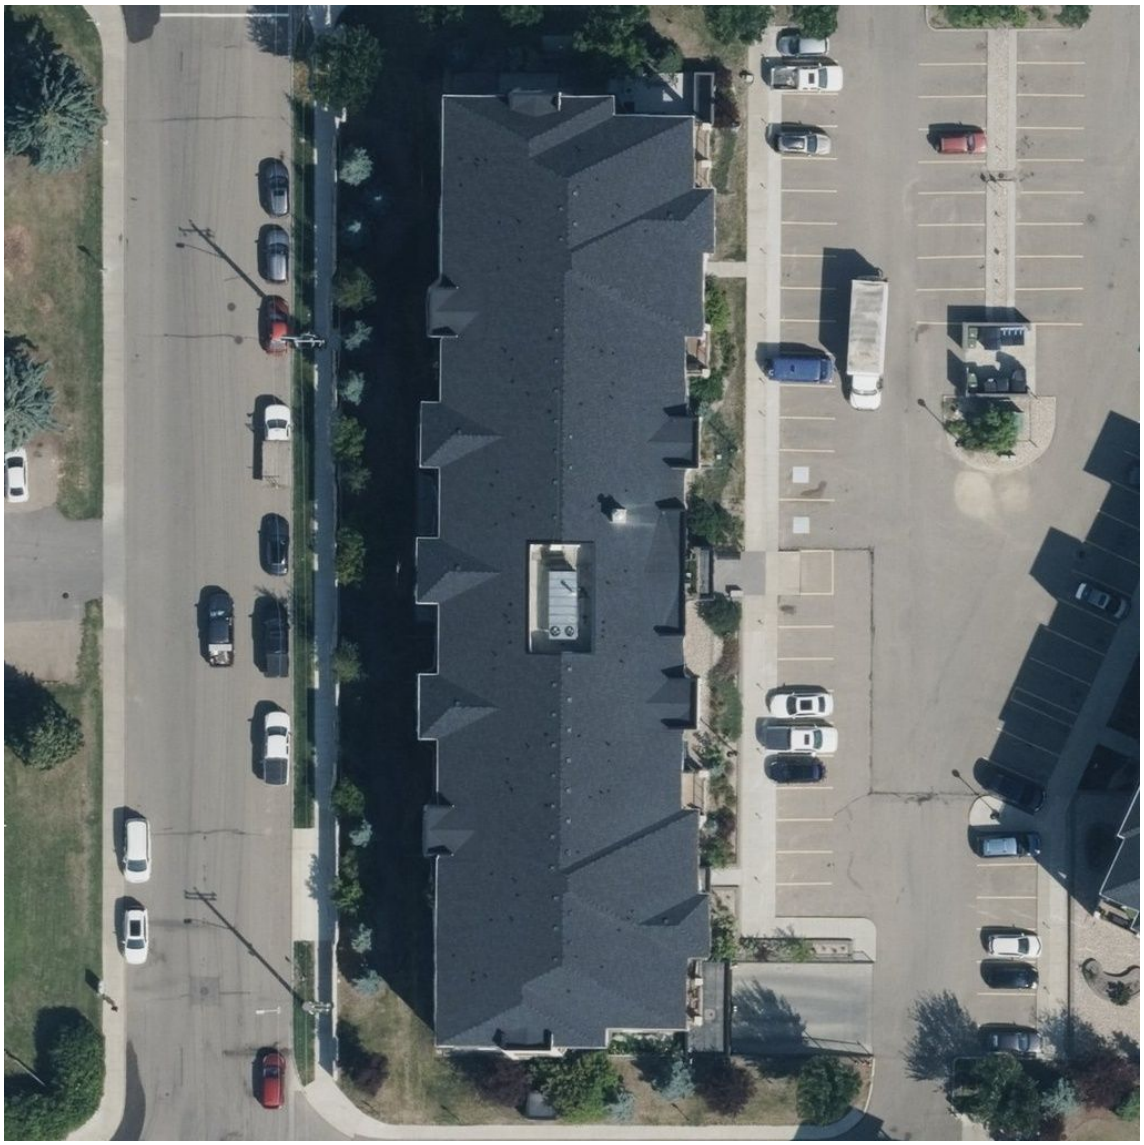

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

7805 71 Street Northwest, Edmonton, AB T6B 3V6

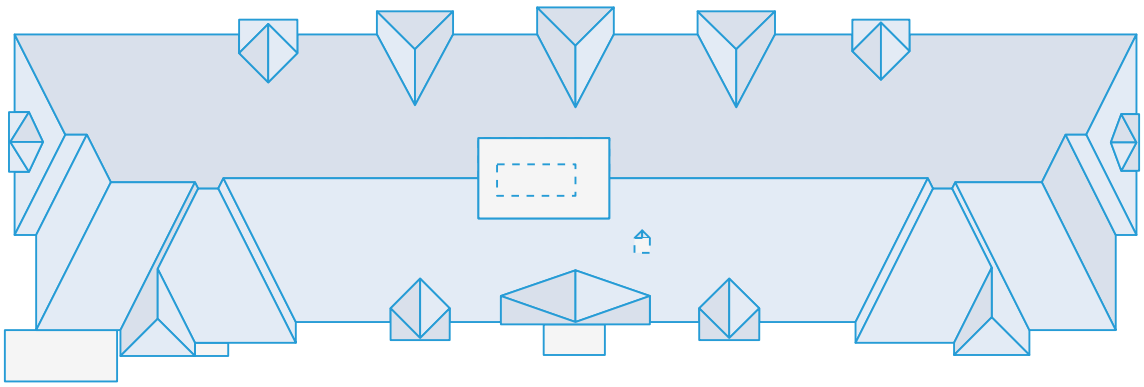


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

7805 71 Street Northwest, Edmonton, AB T6B 3V6

- Eaves: 664ft 2in
- Ridges: 384ft 8in
- Step flashing: 67ft 6in
- Parapet wall: 192ft 11in
- Valleys: 643ft 7in
- Rakes: 37ft 6in
- Curb flashing: 0ft 0in
- Unspecified: 141ft 2in
- Hips: 466ft 9in
- Wall flashing: 187ft 8in
- Transitions: 0ft 0in

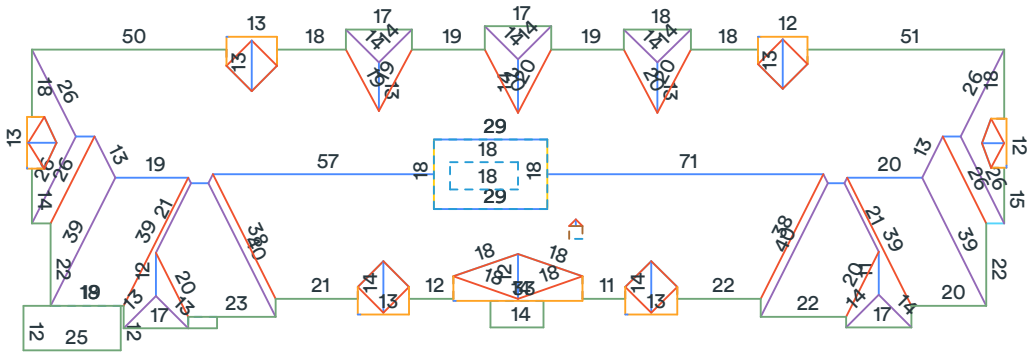

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

7805 71 Street Northwest, Edmonton, AB T6B 3V6

Total roof area: 18199 sqft
Pitched roof area: 17214 sqft
Flat roof area: 985 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 4/12
Predominant pitch area: 14420 sqft
Unspecified pitch area: 0 sqft

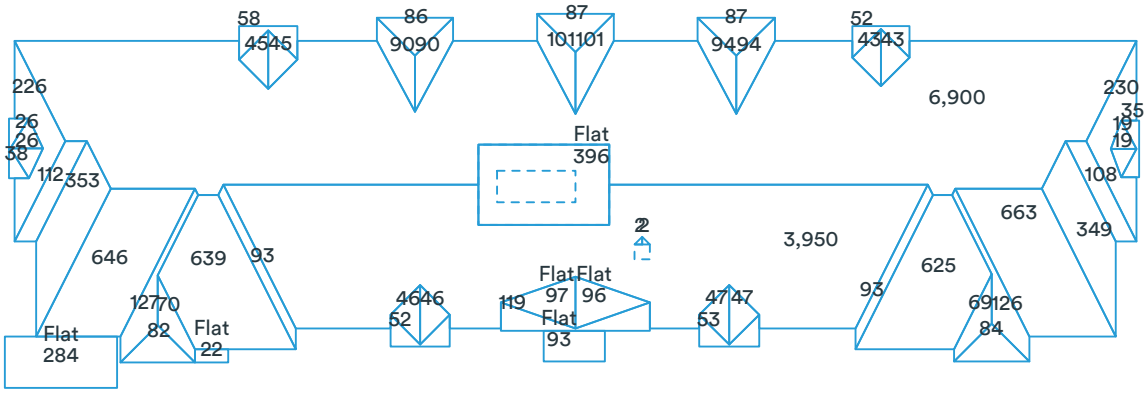


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

7805 71 Street Northwest, Edmonton, AB T6B 3V6

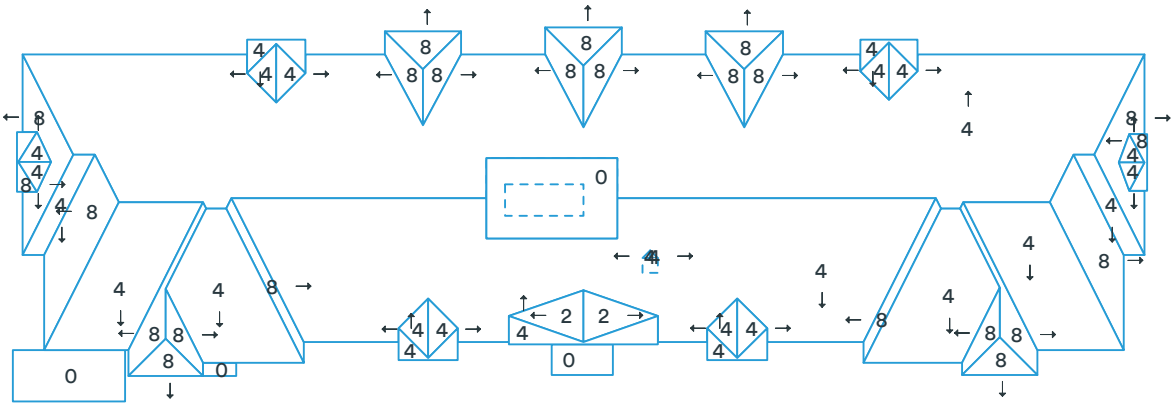


Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

7805 71 Street Northwest, Edmonton, AB T6B 3V6

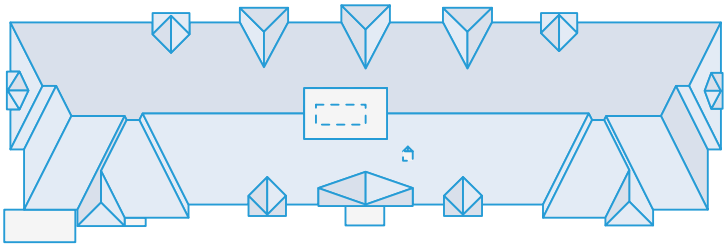

Measurements

Total roof area	18199 sqft
Total pitched area	17214 sqft
Total flat area	985 sqft
Total roof facets	56 facets
Predominant pitch	4/12
Total eaves	664ft 2in
Total valleys	643ft 7in
Total hips	466ft 9in
Total ridges	384ft 8in
Total rakes	37ft 6in
Total wall flashing	187ft 8in
Total step flashing	67ft 6in
Total curb flashing	0ft 0in
Total transitions	0ft 0in
Total parapet wall	192ft 11in
Total unspecified	141ft 2in
Hips + ridges	851ft 5in
Eaves + rakes	701ft 9in

Pitch	0/12	2/12	4/12	8/12
Area (sqft)	793	193	14,421	2,795
Squares	8.0	2.0	144.3	28.0

Report summary

7805 71 Street Northwest. Edmonton. AB T6B 3V6

		Recommended					
Pitched waste %	0%	10%	12%	15%	17%	20%	22%
Pitched area (Sqft)	17,215	18,936	19,281	19,797	20,141	20,658	21,002
Squares	172.2	189.4	192.9	198.0	201.5	206.6	210.1

Flat waste %	0%	10%	12%	15%	17%	20%	22%
Flat area (Sqft)	986	1,084	1,104	1,133	1,153	1,183	1,202
Squares	9.9	10.9	11.1	11.4	11.6	11.9	12.1

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

7805 71 Street Northwest, Edmonton, AB T6B 3V6

Product	Unit	Waste (0%)	Waste (10%)	Waste (15%)	Waste (20%)
Shingle (total sqft)		17,215 sqft	18,936 sqft	19,797 sqft	20,658 sqft
IKO - Cambridge	bundle	517	569	595	621
CertainTeed - Landmark	bundle	525	578	604	630
GAF - Timberline	bundle	525	578	604	630
Owens Corning - Duration	bundle	525	578	604	630
Atlas - Pristine	bundle	522	574	600	626
Starter (eaves + rakes)		702 ft	772 ft	807 ft	843 ft
IKO - Leading Edge Plus	bundle	6	7	7	8
CertainTeed - SwiftStart	bundle	7	7	7	8
GAF - Pro-Start	bundle	6	7	7	7
Owens Corning - Starter Strip	bundle	7	8	8	9
Atlas - Pro-Cut	bundle	6	6	6	7
Ice and Water (eaves + valleys + flashings)		1,563 ft	1,720 ft	1,798 ft	1,876 ft
IKO - StormShield	roll	25	27	28	29
CertainTeed - WinterGuard	roll	25	27	28	29
GAF - WeatherWatch	roll	24	26	27	29
Owens Corning - WeatherLock	roll	21	23	24	26
Atlas - Weathermaster	roll	25	27	28	29
Synthetic (total sqft; no laps)		17,215 sqft	18,936 sqft	19,797 sqft	20,658 sqft
IKO - Stormtite	roll	18	19	20	21
CertainTeed - RoofRunner	roll	18	19	20	21
GAF - Deck-Armor	roll	18	19	20	21
Owens Corning - RhinoRoof	roll	18	19	20	21
Atlas - Summit	roll	18	19	20	21
Capping (hips + ridges)		852 ft	937 ft	980 ft	1,022 ft
IKO - Hip and Ridge	bundle	29	32	34	35
CertainTeed - Shadow Ridge	bundle	29	32	33	35
GAF - Seal-A-Ridge	bundle	35	38	40	41
Owens Corning - DecoRidge	bundle	43	47	49	52
Atlas - Pro-Cut H&R	bundle	28	31	32	33
Other					
8' Valley (no laps)	sheet	81	89	93	97
10' Drip Edge (eaves + rakes; no laps)	sheet	71	78	81	85

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.