Sample property

PROJECT TOTALS


Total Roof Area	7,923 SF
Predominant Pitch	8:12 (33.7°)
Gross Area (w/8% waste)	8,557 SF
IWB (Ice & Water Barrier)	2,859 SF

ROOF PLANES	STRUCTURES
31	1

EDGE LENGTHS

→ amber = order quantity w/ 8% waste

Eave (drip edge)	383 LF → 414
Rake Edge (gable)	66 LF → 71
Total Perimeter	**449 LF → 485**
Ridge	160 LF → 173
Hip	371 LF → 401
Valley	269 LF → 291
Overhang Offset	54 LF → 58

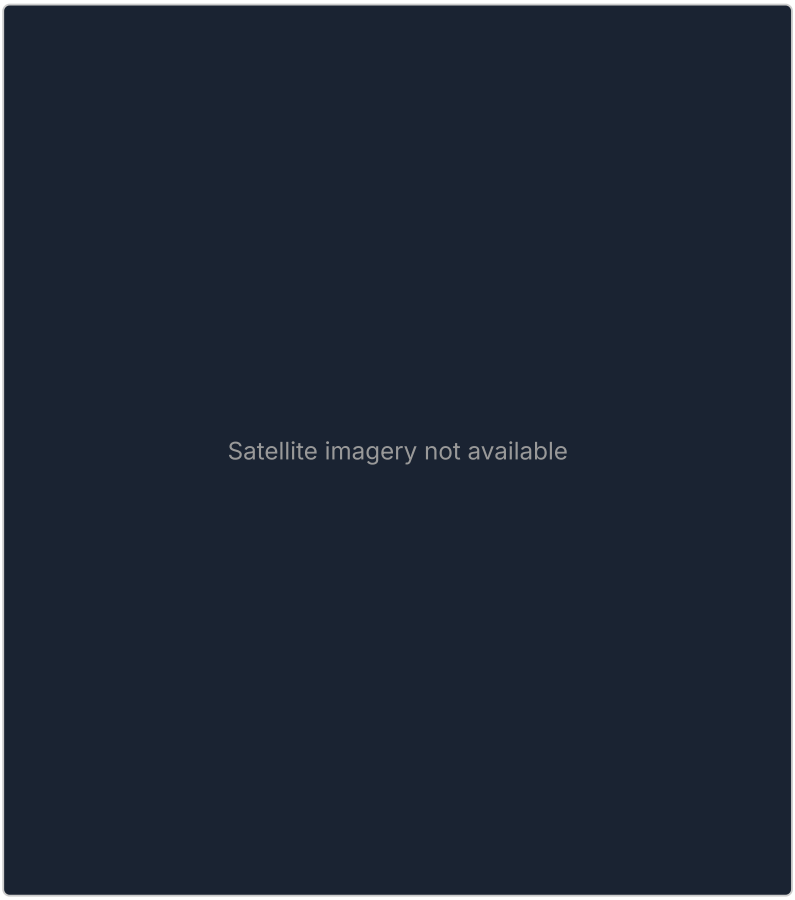

WASTE FACTOR (TOTAL ROOF AREA)

Waste %	5%	8%	10%	15%	20%
Area (SF)	8,319	**8,557**	8,715	9,111	9,508
Squares	83.2	**85.6**	87.2	91.1	95.1

Highlighted column = the waste factor applied to this report (set by you).

AREA BY ROOF PLANE

Plane	Area (SF)	Pitch	% Total
Upper Roof	7,791 → 8,414	8:12	98.3%
Hidden Under Overhang 1	25 → 27	8:12	0.3%
Hidden Under Overhang 2	18 → 19	8:12	0.2%
Hidden Under Overhang 3	35 → 38	8:12	0.4%
Lower Eave 1	72 → 78	8:12	0.9%
Obstructions deducted	*−18 SF*	*15 traced obstructions (15 vents)*	
Total	**7,923 SF → 8,557**	**8:12**	**100%**

AREAS PER PITCH

Pitch	Area (SF)	Squares	Faces	% of Roof
8:12	7,941	79.4	31	100.2%
Obstructions deducted	*−18*	*−0.2*		*−0.2%*
Total	**7,923**	**79.2**	**31**	**100%**

Roof Outline — Traced Footprint

The measured roof traced over the property aerial — the house perimeter is outlined in green and every ridge, hip & valley is shown in blue.

TOTAL ROOF AREA


79.2 squares

Does not include waste

SUGGESTED WASTE FACTOR

8%

85.6 squares with waste

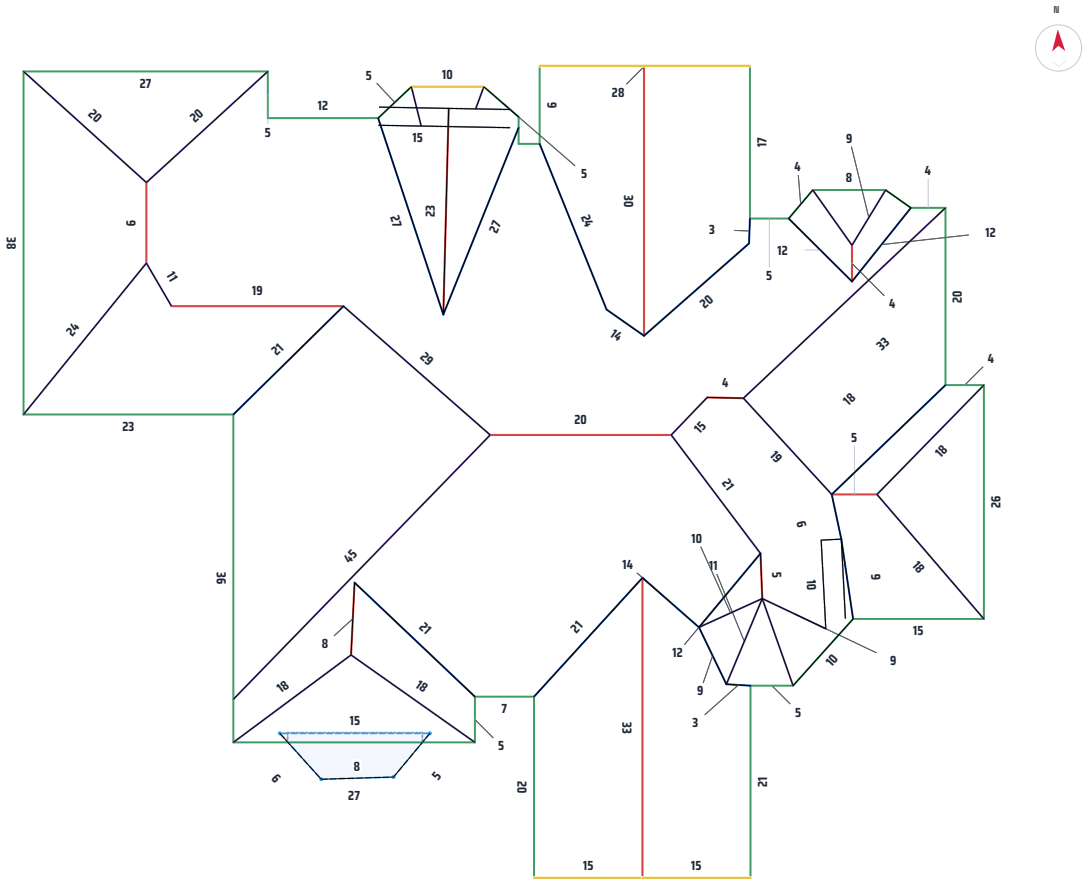


DRAWING KEY — MEASURED LENGTHS BY ROOF LEVEL

ALL LEVELS — TOTAL	EAVE 383 LF	RAKE 66 LF	RIDGE 160 LF	HIP 371 LF	VALLEY 269 LF · OVERHANG 54 LF
UPPER ROOF	EAVE 364 LF	RAKE 66 LF	RIDGE 160 LF	HIP 371 LF	VALLEY 269 LF
LOWER EAVE 1	EAVE 19 LF				

ROOF TOTALS

TOTAL AREA	SQUARES	FACETS	PREDOM. PITCH
7,923 SF	79.2	31	8:12

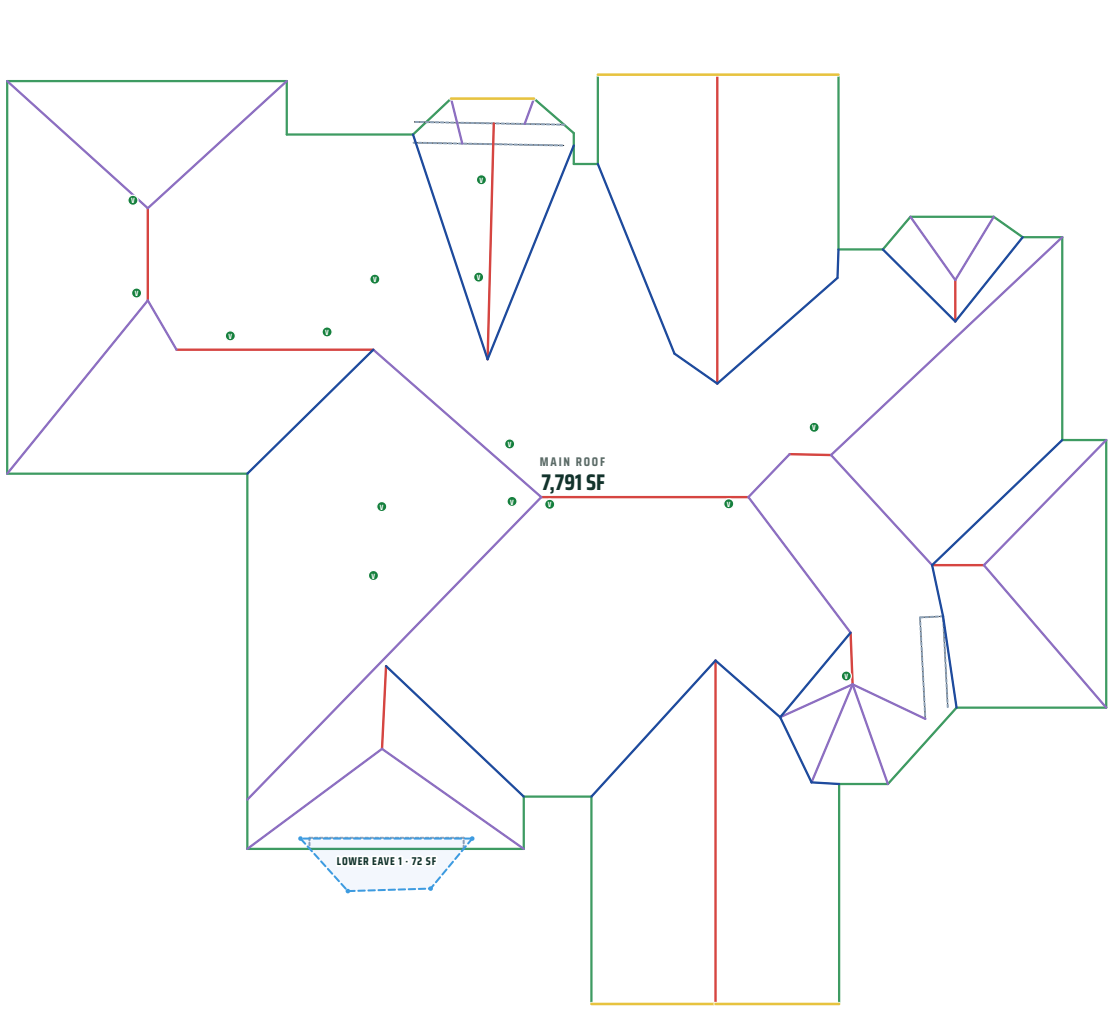

DRAWING KEY — AREAS BY SECTION

MAIN ROOF	LOWER EAVE 1	HIDDEN OVERHANGS — TOTAL (3)	VENTS
7,791 SF	72 SF	78 SF	15

ROOF TOTALS

TOTAL AREA	SQUARES	FACETS	PREDOM. PITCH
7,923 SF	79.2	31	8:12

Roof Measurement & Material Summary

Sample property

TOTAL ROOF AREA	GROSS W/8% WASTE	PITCH
7,923 SF	**8,557 SF**	**8:12**
79.2 squares	85.6 squares	33.7°

ROOF MEASUREMENTS

Total Roof Area (Sloped)	7,923 SF
Footprint (Projected) Area	6,592 SF
Gross Area (w/8% waste)	8,557 SF
Roofing Squares (net)	79.2
Roofing Squares (gross)	85.6
Predominant Pitch	8:12 (33.7°)
Slope Multiplier	×1.2019
Roof Planes	31
Ice & Water (Eave Perimeter)	383 LF

MATERIAL SUMMARY

Material	Qty	Unit	Based On
■ **Field Shingles**	**238**	bundles	1 bundle = 33.3 sq ft · **does not include waste**
↳ **Field Shingles · with 8% waste**	**257**	bundles	1 bundle = 33.3 sq ft + 8% waste (set by you)
■ **Underlayment**	**8,557**	SF	7,923 SF net + 8% waste
❄ **Ice & Water Shield**	**383**	LF	383 ft eave perimeter · membrane coverage 2,859 SF (code-trigger basis)
▲ **Ridge Cap**	**573**	LF	160 ft ridge + 371 ft hip + 8% waste
▬ **Starter Strip**	**5**	bundles	383 ft eaves + 8% waste ÷ 100 LF/bundle
– **Drip Edge — Eaves**	**414**	LF	383 ft eaves (the gutter line) + 8% waste
╱ **Rake Edge (gable drip edge)**	**71**	LF	66 ft rakes (sloped gable edges) + 8% waste
↳ **Drip edge total · eaves + rakes**	**485**	LF	449 ft (eave + rake) + 8% waste
▼ **Valley Flashing**	**30**	pcs	269 ft valley + 8% waste = 290.5 LF
▭ **Overhang Offset Flashing**	**6**	sticks	58.4 LF upper-eave-over-lower-roof junction (incl. 8% waste)

WASTE FACTOR REFERENCE

5%	10%	15%	20%
8,319 SF	8,715 SF	9,111 SF	9,508 SF

GUTTERS (measured from the traced eave perimeter)

TOTAL GUTTER	DOWNSPOUTS
383 LF	**—**
5″ K-style aluminum	not surveyed on this trace

Gutter length is the eave perimeter measured on this roof: rake (gable) ends and lower-tier wall junctions carry no gutter and are excluded. Downspouts are reported only where one was placed during tracing — drop locations cannot be determined from aerial imagery, so a blank here means not surveyed, not none. Confirm gutter runs, corners and drop placement on site.

Accuracy: measurements are taken from aerial imagery; accuracy depends on imagery quality and roof visibility. Physical verification recommended for code-critical work. © 2026 Roof Manager.