Roof Report

Prepared by Roofr

17 Deacon Place, St. Albert, AB T8N 6S5

1693 sqft

16 facets


Predominant pitch 5/12



This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

17 Deacon Place, St. Albert, AB T8N 6S5

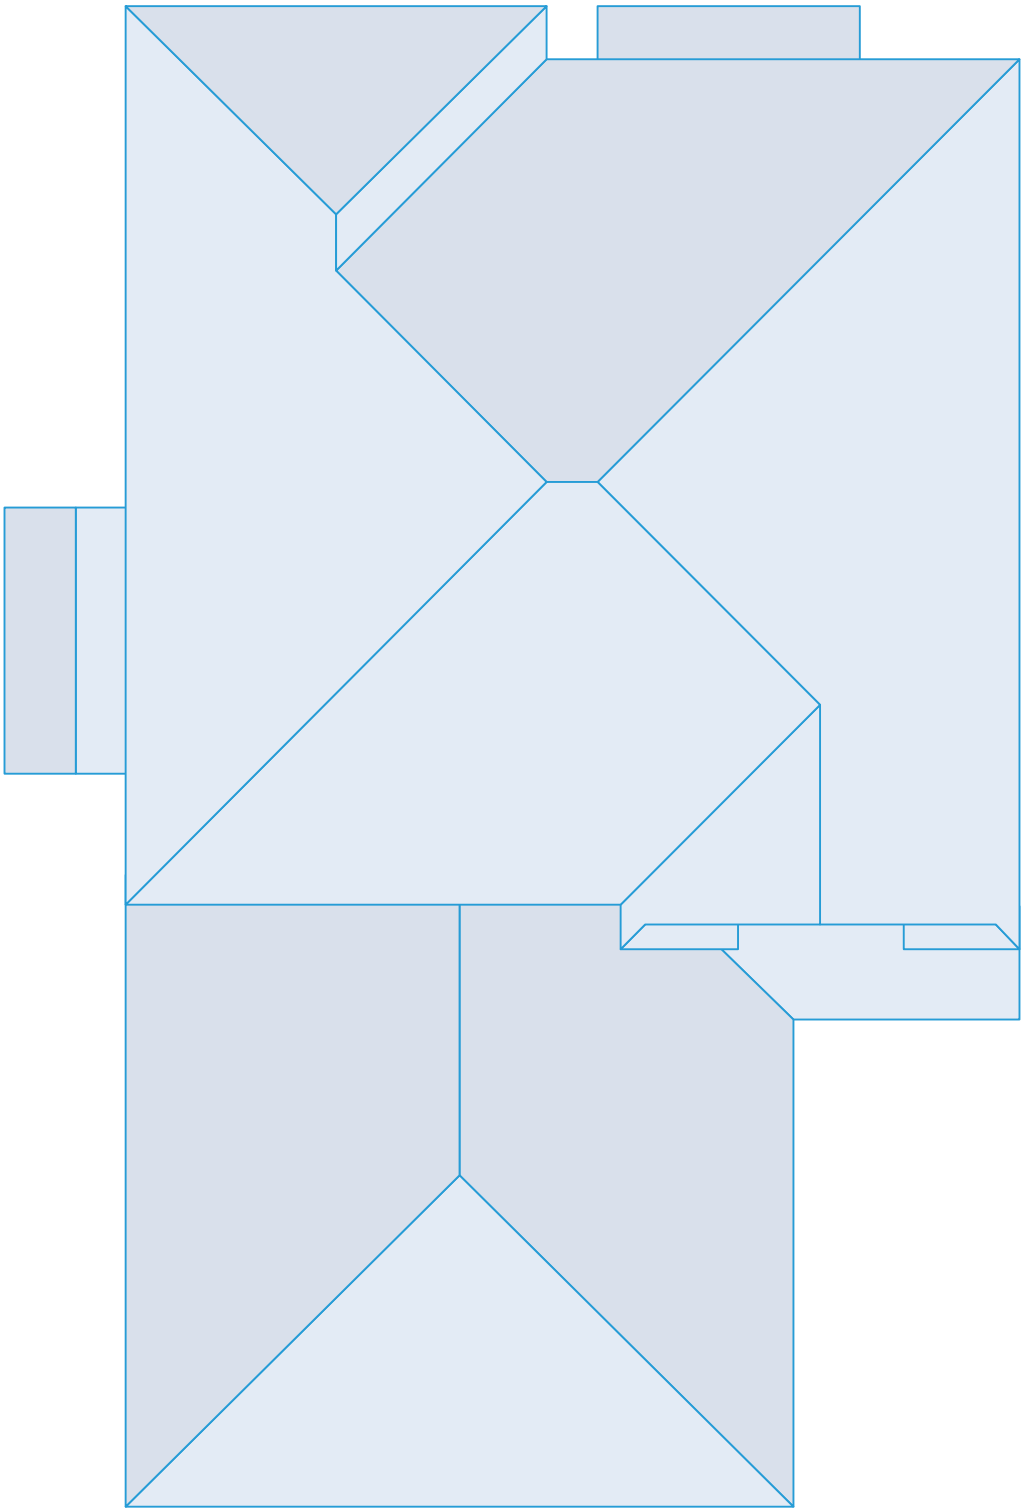


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

17 Deacon Place, St. Albert, AB T8N 6S5

- Eaves: 210ft 1in
- Ridges: 31ft 0in
- Step flashing: 23ft 4in
- Parapet wall: 0ft 0in
- Valleys: 26ft 11in
- Rakes: 37ft 9in
- Curb flashing: 0ft 0in
- Unspecified: 2ft 5in
- Hips: 123ft 5in
- Wall flashing: 37ft 1in
- Transitions: 0ft 0in

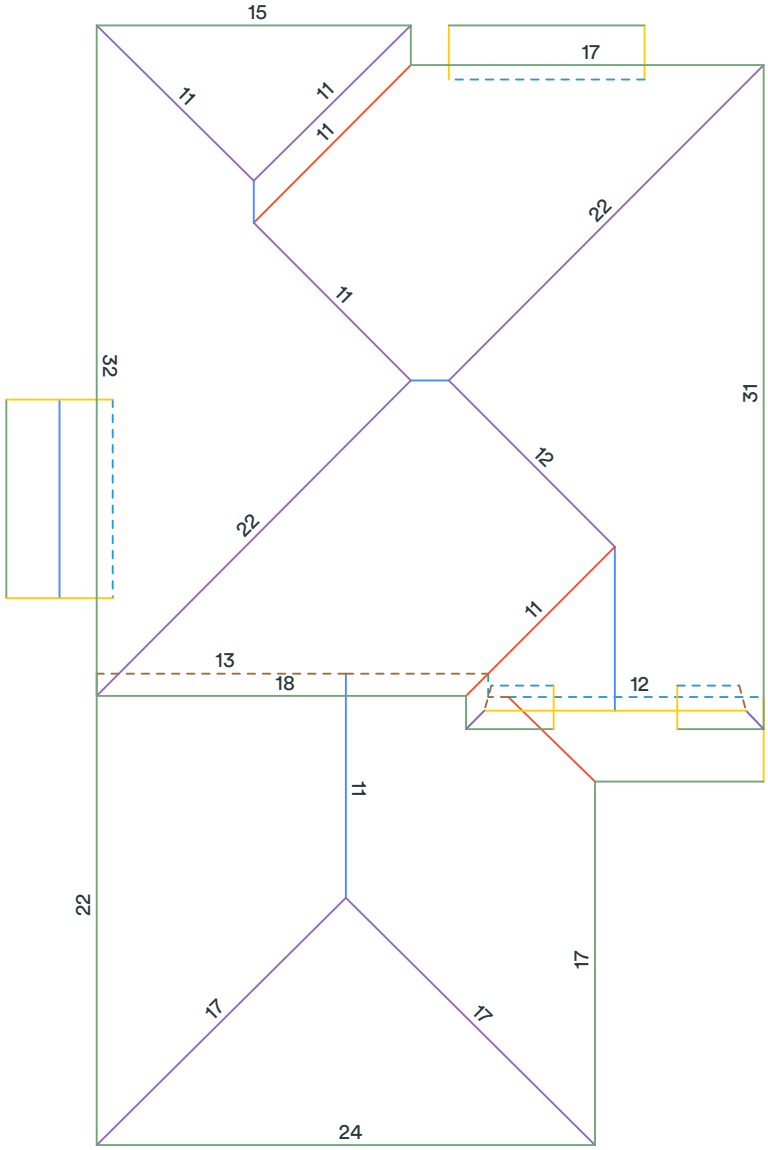

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

17 Deacon Place, St. Albert, AB T8N 6S5

Total roof area: 1693 sqft
Pitched roof area: 1693 sqft
Flat roof area: 0 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 5/12
Predominant pitch area: 1645 sqft
Unspecified pitch area: 0 sqft

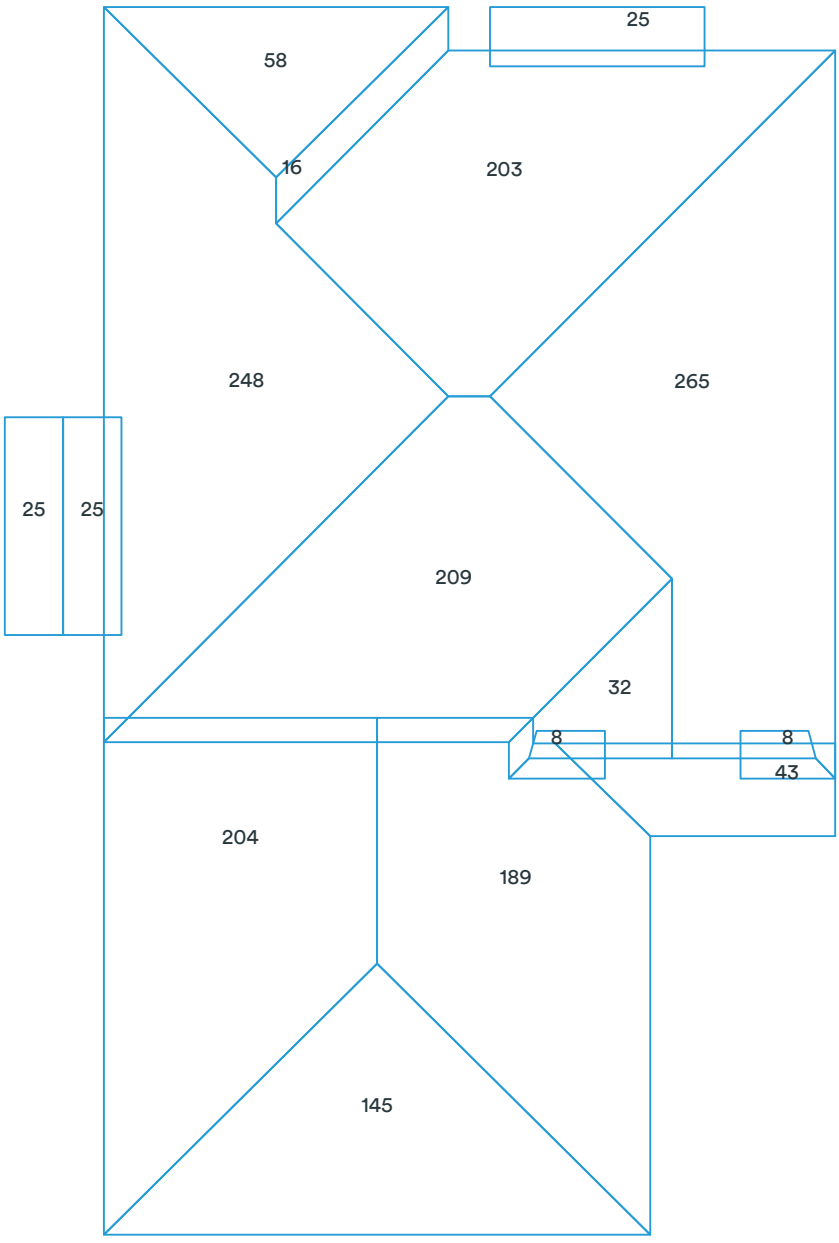


Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

17 Deacon Place, St. Albert, AB T8N 6S5

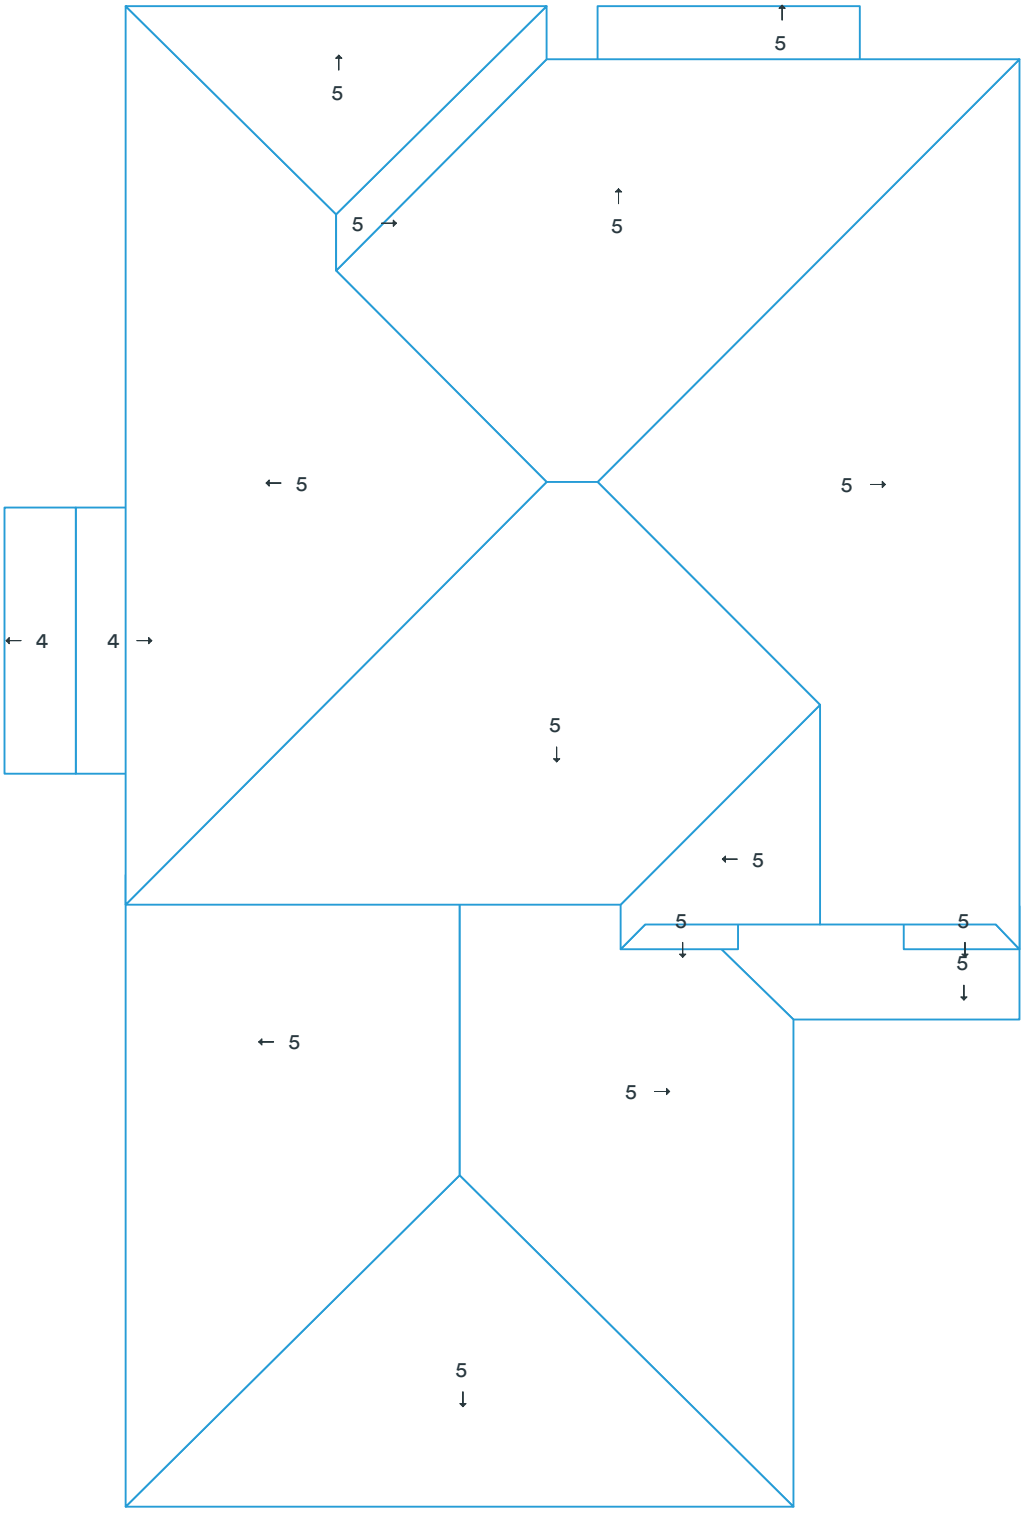


Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

17 Deacon Place, St. Albert, AB T8N 6S5

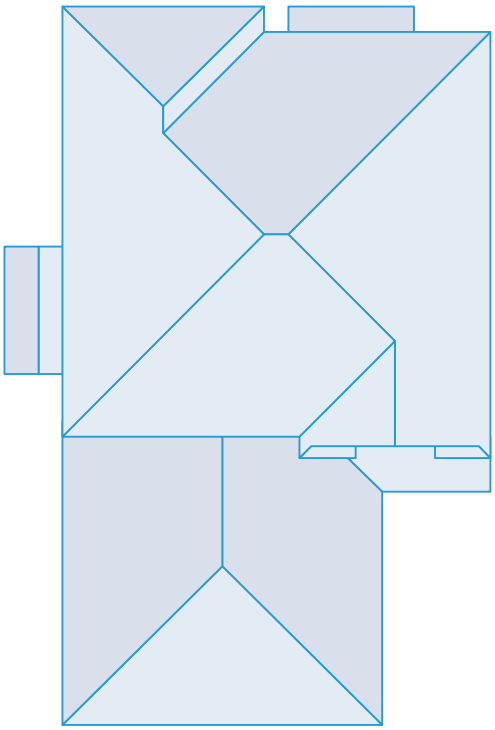

Measurements

Total roof area	1693 sqft
Total pitched area	1693 sqft
Total flat area	0 sqft
Total roof facets	16 facets
Predominant pitch	5/12
Total eaves	210ft 1in
Total valleys	26ft 11in
Total hips	123ft 5in
Total ridges	31ft 0in
Total rakes	37ft 9in
Total wall flashing	37ft 1in
Total step flashing	23ft 4in
Total curb flashing	0ft 0in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	2ft 5in
Hips + ridges	154ft 5in
Eaves + rakes	247ft 9in

Pitch	4/12	5/12
Area (sqft)	49	1,646
Squares	0.5	16.5

				Recommended			
Pitched waste %	10%	12%	15%	16%	17%	20%	22%
Pitched area (Sqft)	1,863	1,897	1,948	1,965	1,982	2,032	2,066
Squares	18.7	19.0	19.5	19.7	19.9	20.4	20.7

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

17 Deacon Place, St. Albert, AB T8N 6S5

Product	Unit	Waste (10%)	Waste (15%)	Waste (16%)	Waste (20%)
Shingle (total sqft)		1,863 sqft	1,948 sqft	1,965 sqft	2,032 sqft
IKO - Cambridge	bundle	56	59	59	62
CertainTeed - Landmark	bundle	57	60	60	62
GAF - Timberline	bundle	57	60	60	62
Owens Corning - Duration	bundle	57	60	60	62
Atlas - Pristine	bundle	57	60	60	62
Starter (eaves + rakes)		273 ft	285 ft	288 ft	298 ft
IKO - Leading Edge Plus	bundle	3	3	3	3
CertainTeed - SwiftStart	bundle	3	3	3	3
GAF - Pro-Start	bundle	3	3	3	3
Owens Corning - Starter Strip	bundle	3	3	3	3
Atlas - Pro-Cut	bundle	2	3	3	3
Ice and Water (eaves + valleys + flashings)		328 ft	343 ft	345 ft	357 ft
IKO - StormShield	roll	6	6	6	6
CertainTeed - WinterGuard	roll	6	6	6	6
GAF - WeatherWatch	roll	5	6	6	6
Owens Corning - WeatherLock	roll	5	5	5	5
Atlas - Weathermaster	roll	6	6	6	6
Synthetic (total sqft; no laps)		1,863 sqft	1,948 sqft	1,965 sqft	2,032 sqft
IKO - Stormtite	roll	2	2	2	3
CertainTeed - RoofRunner	roll	2	2	2	3
GAF - Deck-Armor	roll	2	2	2	3
Owens Corning - RhinoRoof	roll	2	2	2	3
Atlas - Summit	roll	2	2	2	3
Capping (hips + ridges)		170 ft	178 ft	180 ft	186 ft
IKO - Hip and Ridge	bundle	6	7	7	7
CertainTeed - Shadow Ridge	bundle	6	6	6	7
GAF - Seal-A-Ridge	bundle	7	8	8	8
Owens Corning - DecoRidge	bundle	9	9	9	10
Atlas - Pro-Cut H&R	bundle	6	6	6	6
Other					
8' Valley (no laps)	sheet	4	4	4	5
10' Drip Edge (eaves + rakes; no laps)	sheet	28	29	29	30

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.