Roof Report


Prepared by Roofr

83 Rue Falardeau, Gatineau, QC J8X 3E1

1158 sqft

8 facets


Predominant pitch 1/12

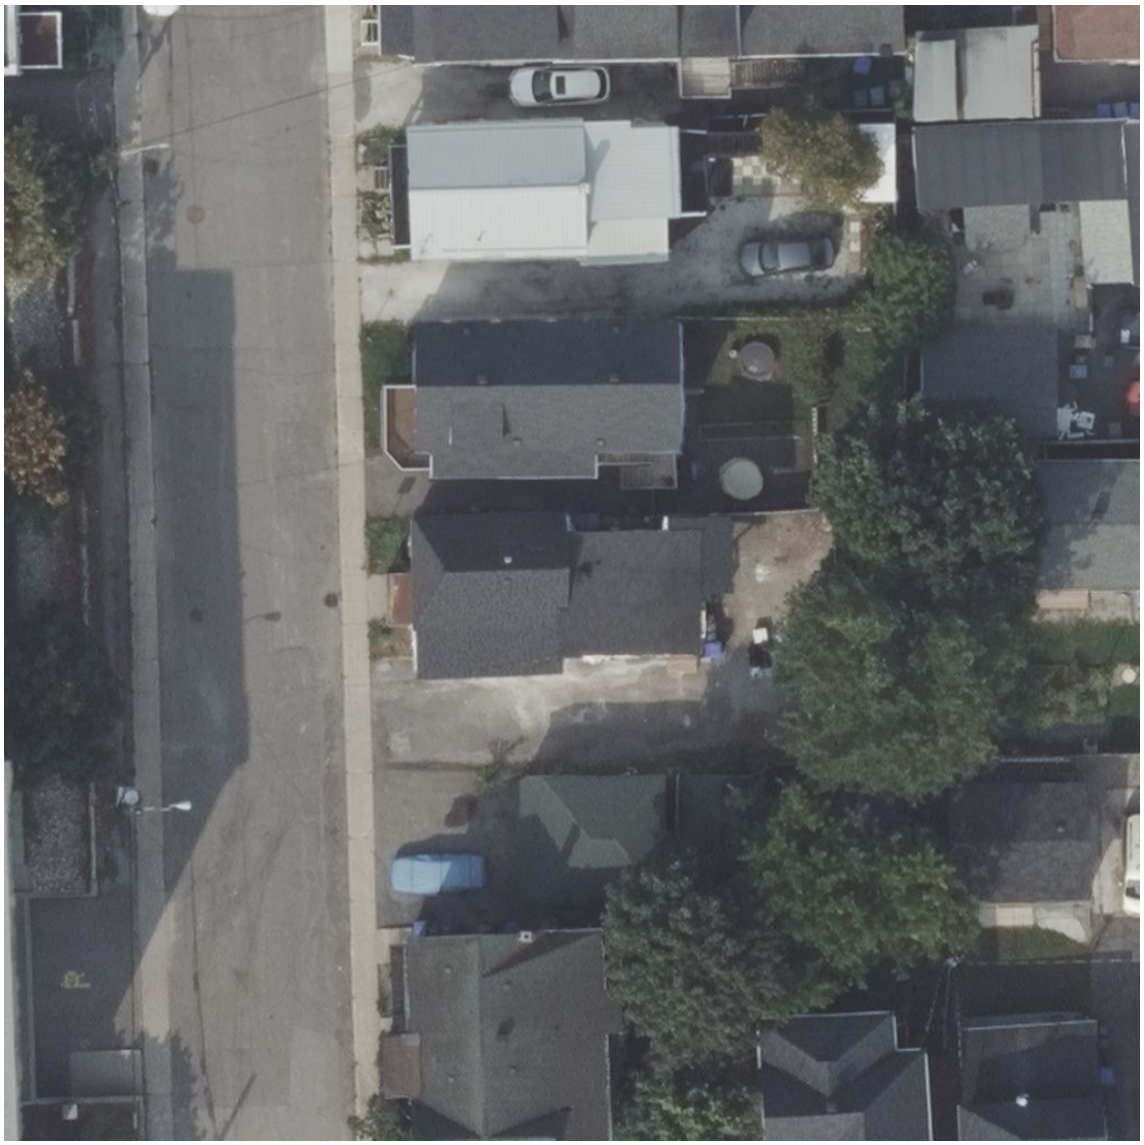

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

83 Rue Falardeau, Gatineau, QC J8X 3E1

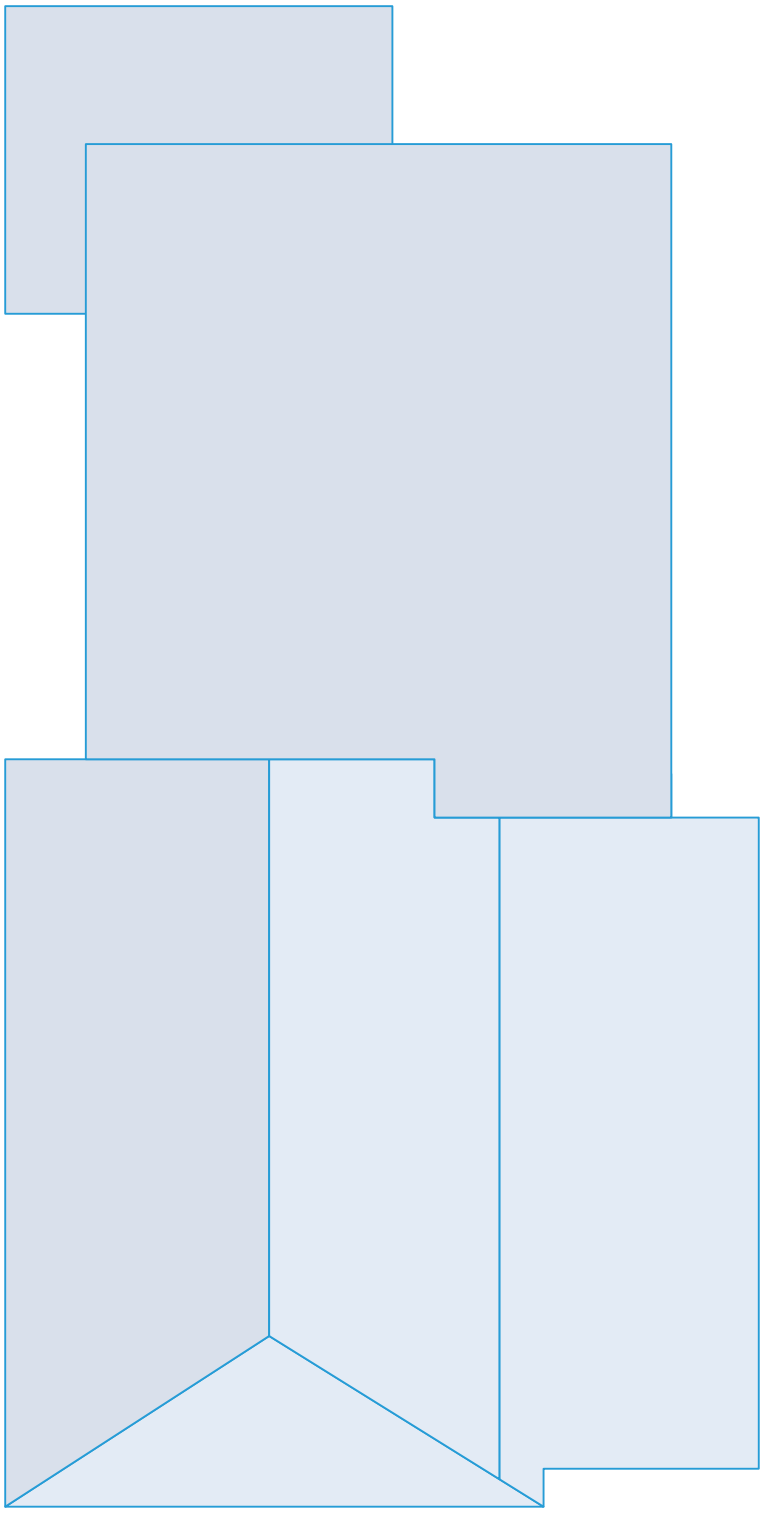


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

83 Rue Falardeau, Gatineau, QC J8X 3E1

- Eaves: 98ft 9in
- Ridges: 30ft 9in
- Step flashing: 23ft 6in
- Parapet wall: 0ft 0in
- Valleys: 0ft 0in
- Rakes: 84ft 7in
- Curb flashing: 0ft 0in
- Unspecified: 14ft 10in
- Hips: 22ft 8in
- Wall flashing: 18ft 0in
- Transitions: 21ft 9in

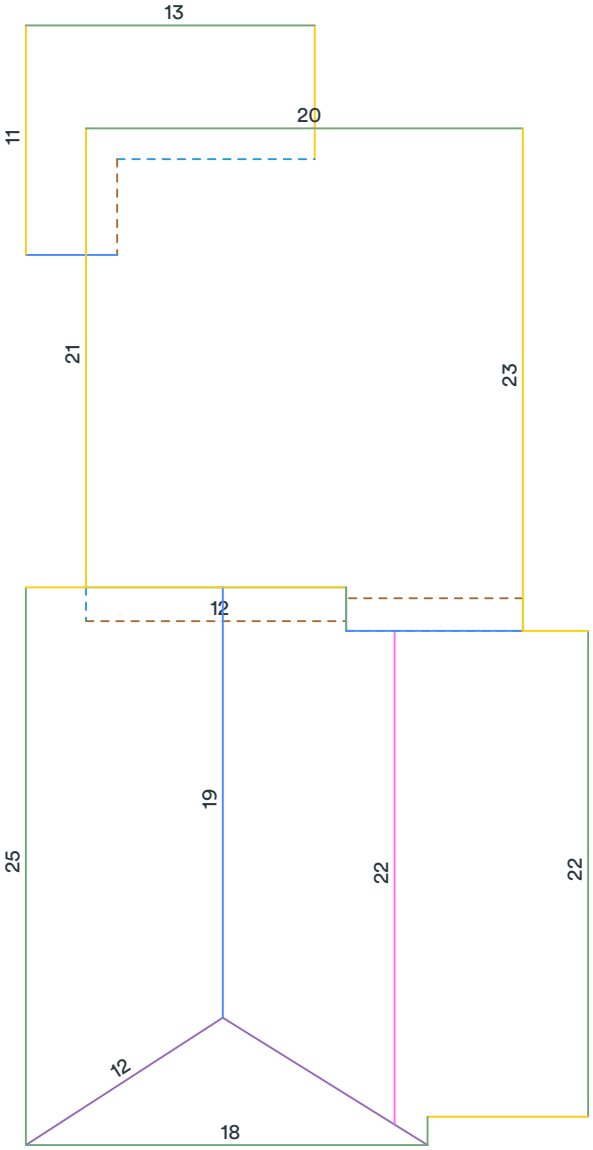



Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Area measurement report

83 Rue Falardeau, Gatineau, QC J8X 3E1

Total roof area: 1158 sqft
Pitched roof area: 643 sqft
Flat roof area: 515 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 1/12
Predominant pitch area: 515 sqft
Unspecified pitch area: 0 sqft

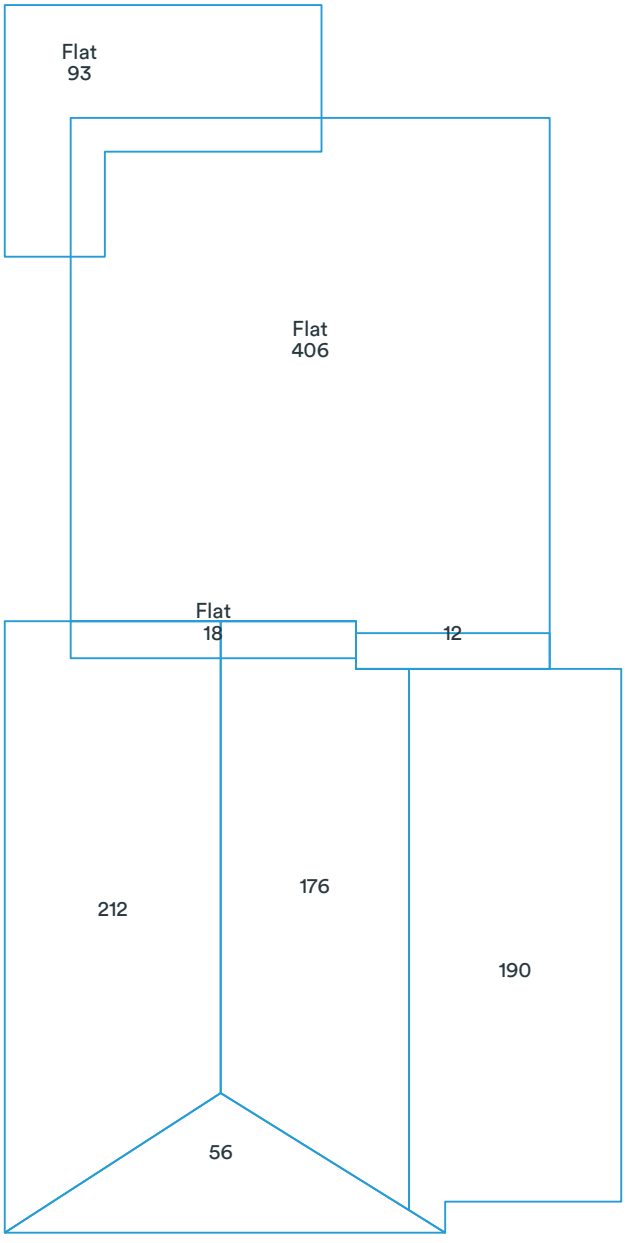




Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

83 Rue Falardeau, Gatineau, QC J8X 3E1

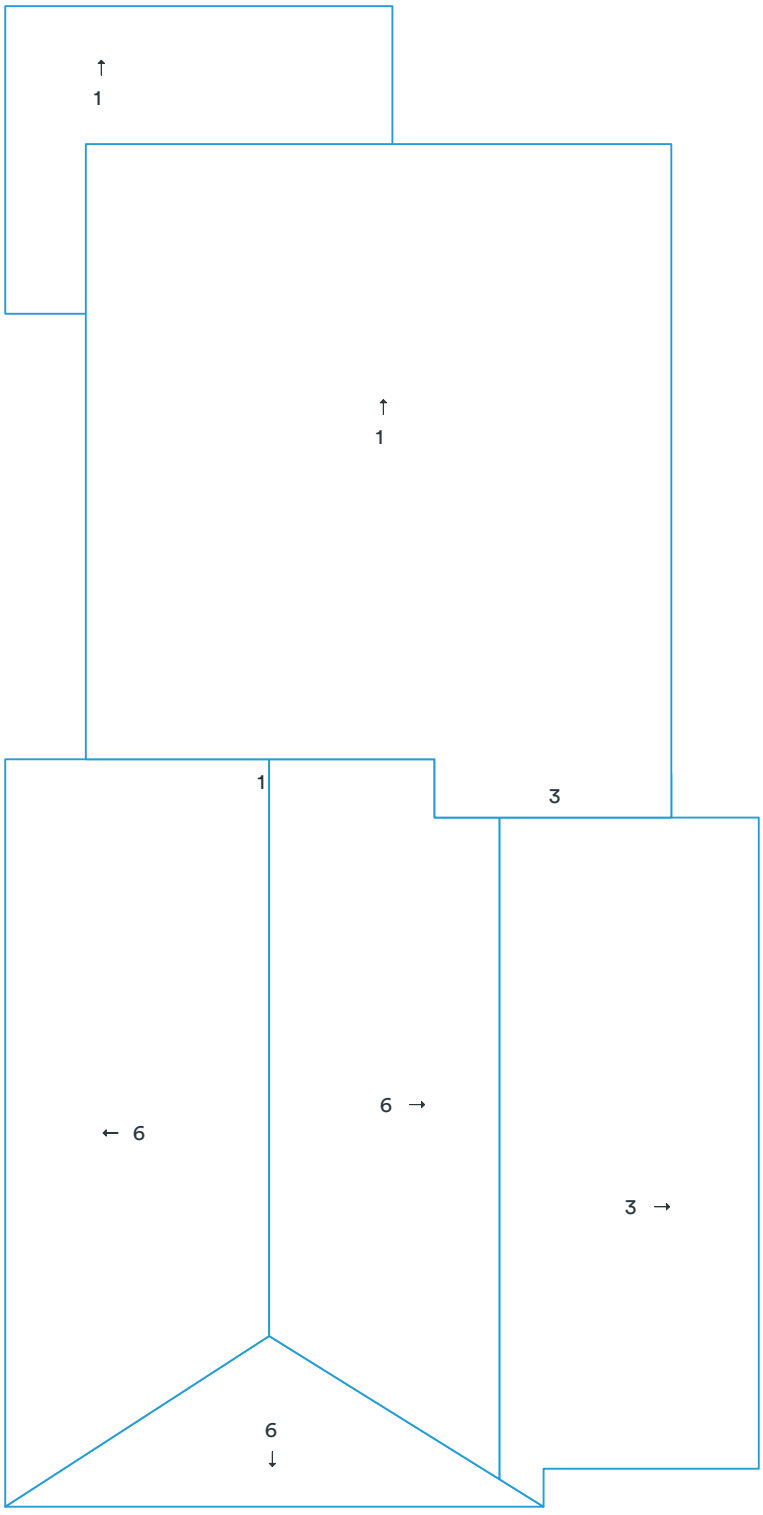


Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

83 Rue Falardeau, Gatineau, QC J8X 3E1

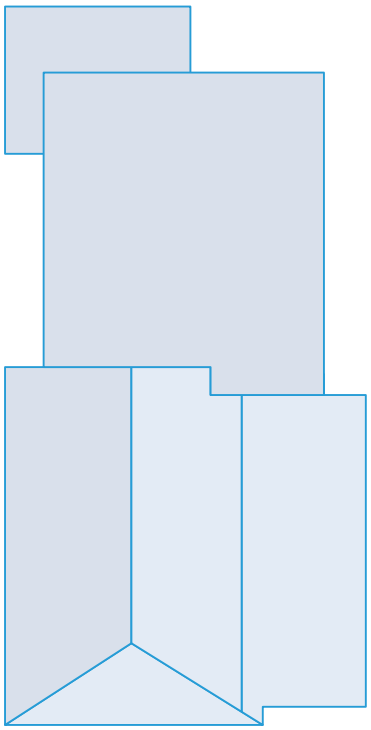

Measurements

Total roof area	1158 sqft
Total pitched area	643 sqft
Total flat area	515 sqft
Total roof facets	8 facets
Predominant pitch	1/12
Total eaves	98ft 9in
Total valleys	0ft 0in
Total hips	22ft 8in
Total ridges	30ft 9in
Total rakes	84ft 7in
Total wall flashing	18ft 0in
Total step flashing	23ft 6in
Total curb flashing	0ft 0in
Total transitions	21ft 9in
Total parapet wall	0ft 0in
Total unspecified	14ft 10in
Hips + ridges	53ft 5in
Eaves + rakes	183ft 4in

Pitch	1/12	3/12	6/12
Area (sqft)	515	201	443
Squares	5.2	2.1	4.5

Report summary

83 Rue Falardeau. Gatineau. QC J8X 3E1

Pitched waste %	10%	12%	15%	17%	20%	22%	Recommended 25%
Pitched area (Sqft)	708	721	740	753	772	785	804
Squares	7.1	7.3	7.4	7.6	7.8	7.9	8.1

Flat waste %	0%	10%	12%	15%	17%	20%	22%
Flat area (Sqft)	515	567	577	592	603	618	628
Squares	5.2	5.7	5.8	6.0	6.1	6.2	6.3

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

83 Rue Falardeau, Gatineau, QC J8X 3E1

Product	Unit	Waste (10%)	Waste (15%)	Waste (20%)	Waste (25%)
Shingle (total sqft)		708 sqft	740 sqft	772 sqft	804 sqft
IKO - Cambridge	bundle	22	23	24	25
CertainTeed - Landmark	bundle	22	23	24	25
GAF - Timberline	bundle	22	23	24	25
Owens Corning - Duration	bundle	22	23	24	25
Atlas - Pristine	bundle	22	23	24	25
Starter (eaves + rakes)		202 ft	211 ft	221 ft	230 ft
IKO - Leading Edge Plus	bundle	2	2	2	2
CertainTeed - SwiftStart	bundle	2	2	2	2
GAF - Pro-Start	bundle	2	2	2	2
Owens Corning - Starter Strip	bundle	2	3	3	3
Atlas - Pro-Cut	bundle	2	2	2	2
Ice and Water (eaves + valleys + flashings)		155 ft	162 ft	169 ft	176 ft
IKO - StormShield	roll	3	3	3	3
CertainTeed - WinterGuard	roll	3	3	3	3
GAF - WeatherWatch	roll	3	3	3	3
Owens Corning - WeatherLock	roll	3	3	3	3
Atlas - Weathermaster	roll	3	3	3	3
Synthetic (total sqft; no laps)		708 sqft	740 sqft	772 sqft	804 sqft
IKO - Stormtite	roll	1	1	1	1
CertainTeed - RoofRunner	roll	1	1	1	1
GAF - Deck-Armor	roll	1	1	1	1
Owens Corning - RhinoRoof	roll	1	1	1	1
Atlas - Summit	roll	1	1	1	1
Capping (hips + ridges)		59 ft	62 ft	65 ft	67 ft
IKO - Hip and Ridge	bundle	2	3	3	3
CertainTeed - Shadow Ridge	bundle	2	3	3	3
GAF - Seal-A-Ridge	bundle	3	3	3	3
Owens Corning - DecoRidge	bundle	3	4	4	4
Atlas - Pro-Cut H&R	bundle	2	2	3	3
Other					
8' Valley (no laps)	sheet	0	0	0	0
10' Drip Edge (eaves + rakes; no laps)	sheet	21	22	23	23

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.