Roof Report

Prepared by Roofr

7704 154A Street Northwest, Edmonton, AB T5R 1V2

2487 sqft

12 facets


Predominant pitch 4/12



This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Diagram

7704 154A Street Northwest, Edmonton, AB T5R 1V2

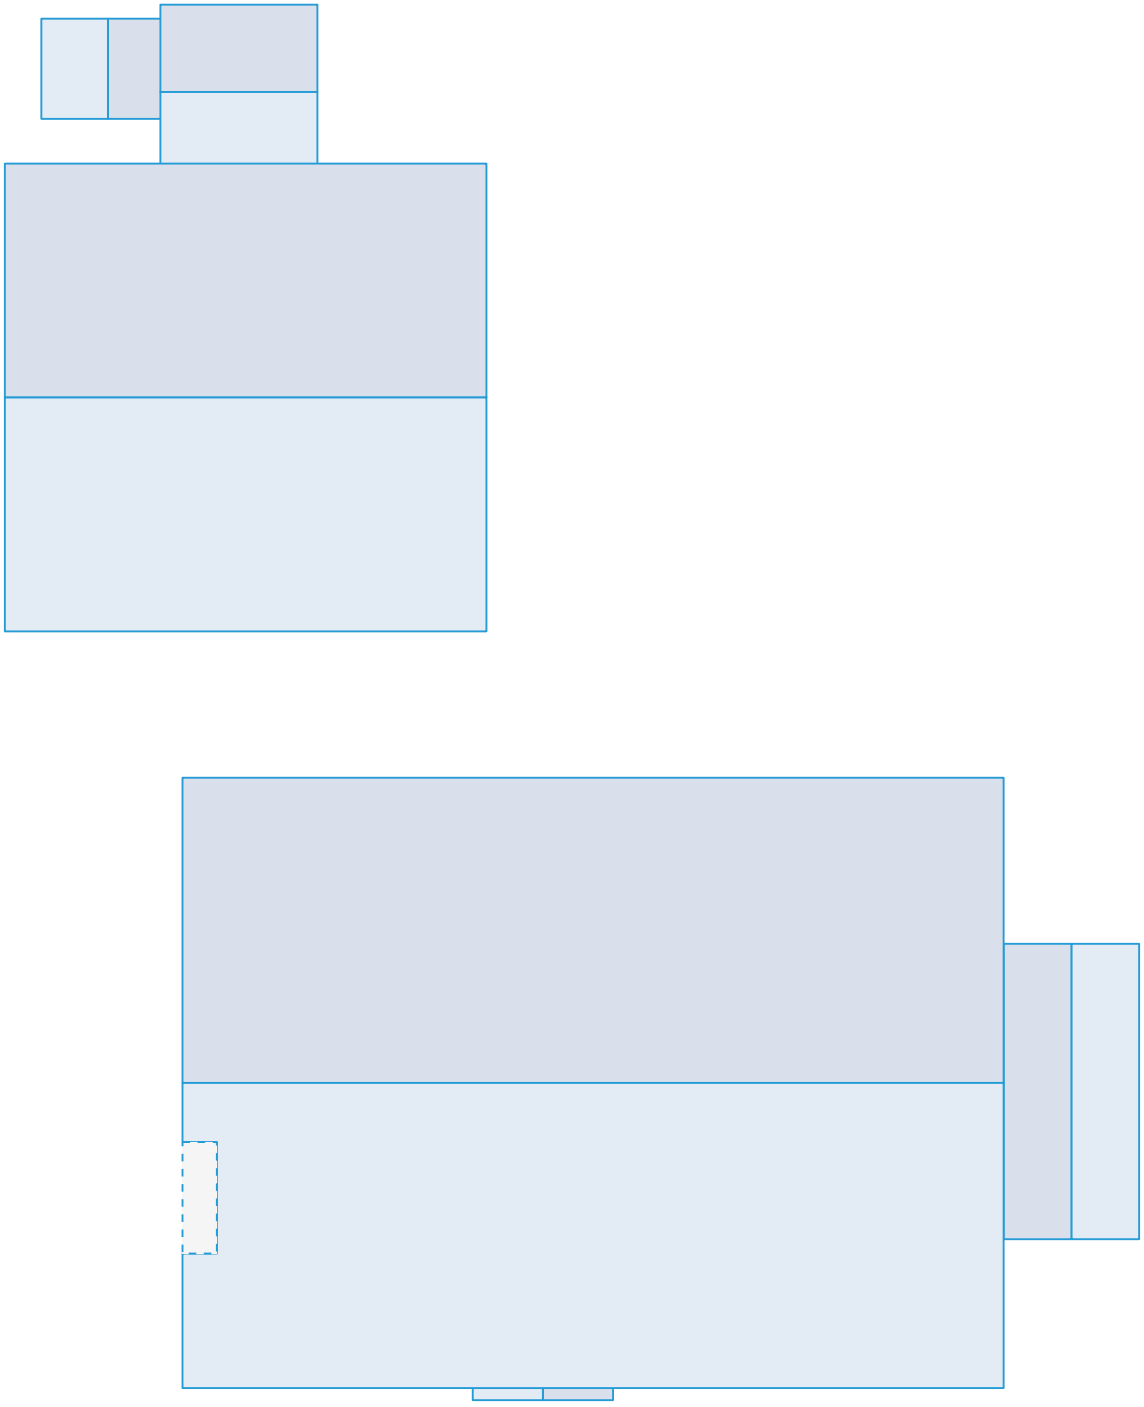



This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Length measurement report

7704 154A Street Northwest, Edmonton, AB T5R 1V2

- Eaves: 174ft 1in
- Ridges: 102ft 0in
- Step flashing: 14ft 4in
- Parapet wall: 0ft 0in
- Valleys: 0ft 0in
- Rakes: 179ft 10in
- Curb flashing: 0ft 0in
- Unspecified: 0ft 0in
- Hips: 0ft 0in
- Wall flashing: 33ft 7in
- Transitions: 0ft 0in

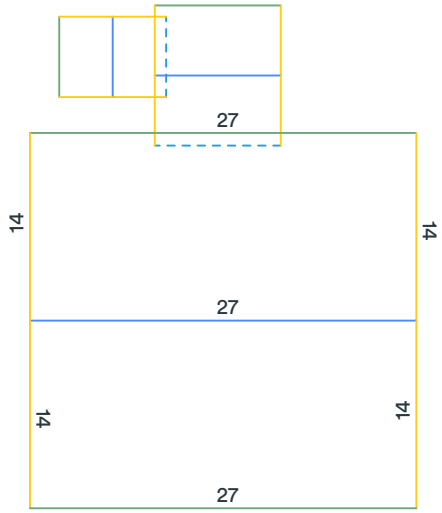

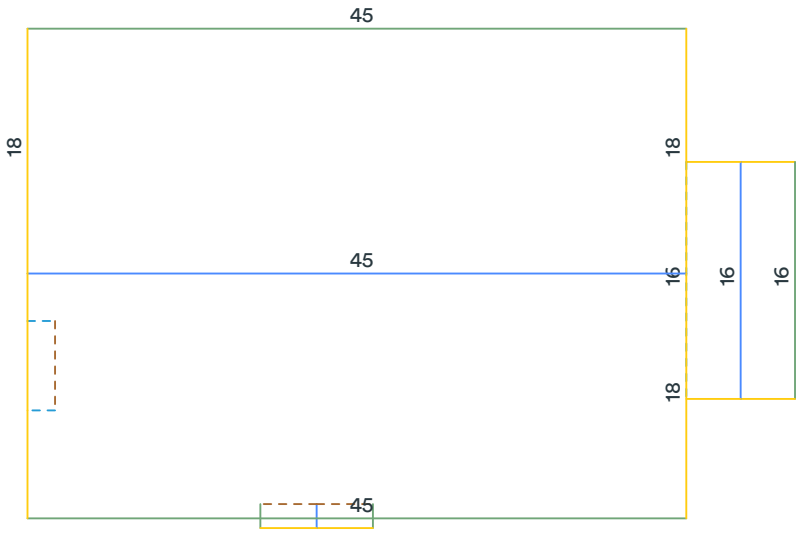

Measurements in diagram are rounded up for display. Some edge lengths may be hidden from diagram to avoid overcrowding.


This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.


Area measurement report

7704 154A Street Northwest, Edmonton, AB T5R 1V2

Total roof area: 2487 sqft
Pitched roof area: 2366 sqft
Flat roof area: 121 sqft
Two story area: 0 sqft
Two layer area: 0 sqft

Predominant pitch: 4/12
Predominant pitch area: 2366 sqft
Unspecified pitch area: 0 sqft

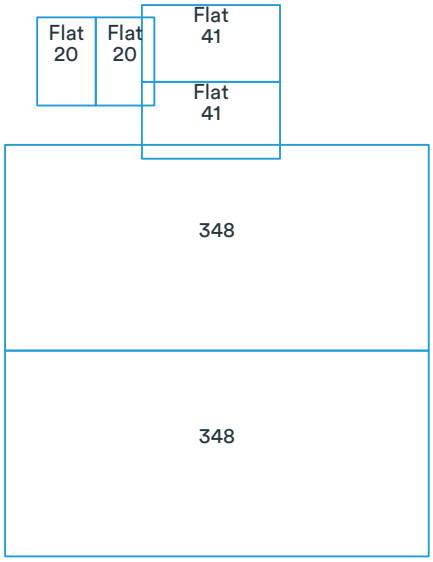

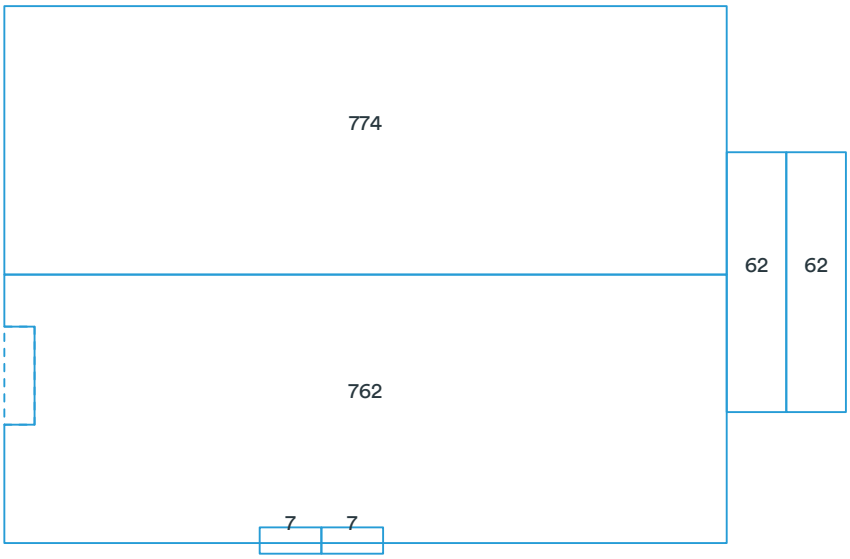





Area measurements in diagram are rounded. The totals at the top of the page are the sums of the exact measurements, which are then rounded. Deleted facets (skylights, chimneys, etc.) are designated with a dashed line and are excluded from the calculations.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Pitch & direction measurement report

7704 154A Street Northwest, Edmonton, AB T5R 1V2

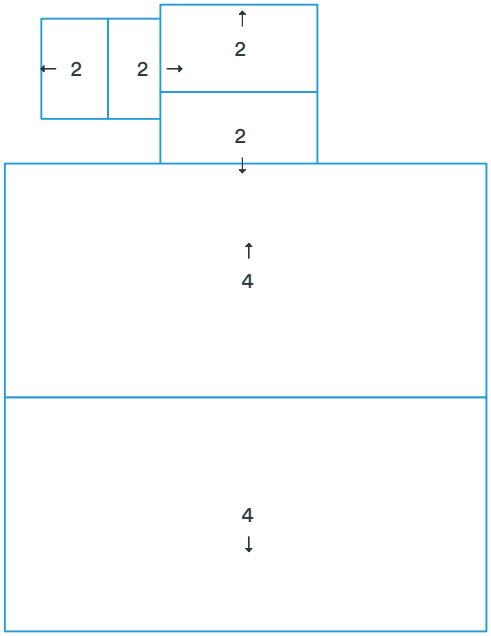

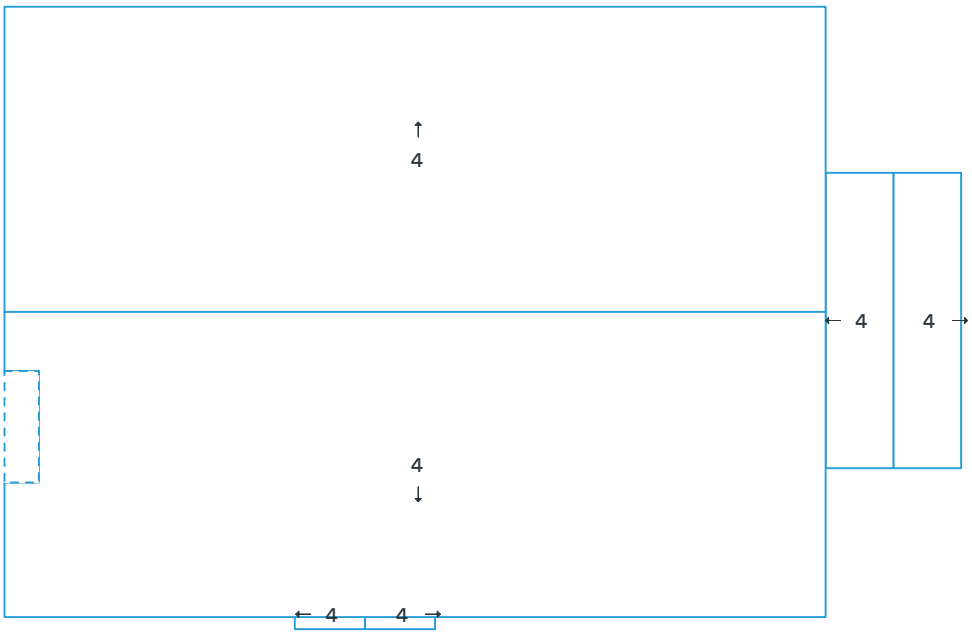




Deleted facets are designated with a dashed line and do not have a pitch.

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Structure #1 summary

7704 154A Street Northwest, Edmonton, AB T5R 1V2

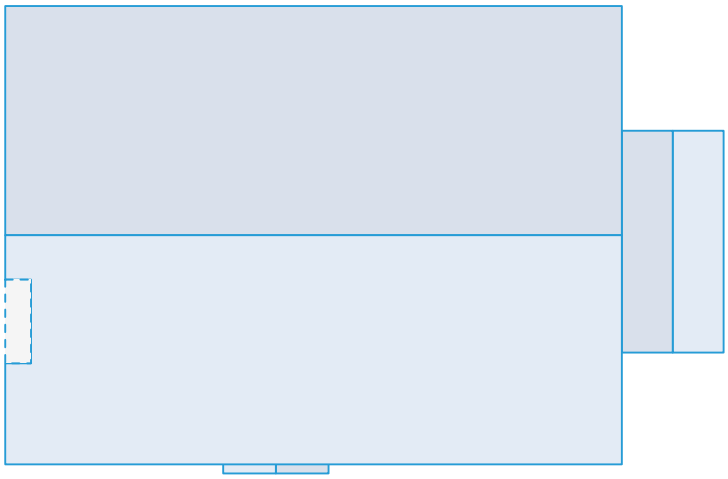

Measurements

Total roof area	1671 sqft
Total pitched area	1671 sqft
Total flat area	0 sqft
Total roof facets	6 facets
Predominant pitch	4/12
Total eaves	108ft 1in
Total valleys	0ft 0in
Total hips	0ft 0in
Total ridges	62ft 0in
Total rakes	92ft 9in
Total wall flashing	19ft 8in
Total step flashing	14ft 4in
Total curb flashing	0ft 0in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	0ft 0in
Hips + ridges	62ft 0in
Eaves + rakes	200ft 9in

Pitch	4/12
Area (sqft)	1,672
Squares	16.8


		Recommended				
Pitched waste %	0%	8%	10%	12%	15%	17%	20%
Pitched area (Sqft)	1,672	1,805	1,839	1,872	1,922	1,956	2,006
Squares	16.8	18.1	18.4	18.8	19.3	19.6	20.1

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Structure #2 summary

7704 154A Street Northwest, Edmonton, AB T5R 1V2

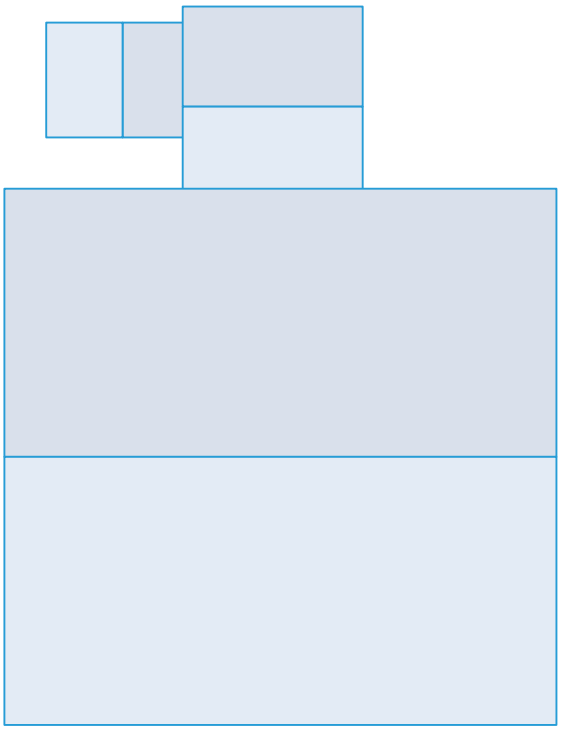

Measurements	
Total roof area	816 sqft
Total pitched area	695 sqft
Total flat area	121 sqft
Total roof facets	6 facets
Predominant pitch	4/12
Total eaves	66ft 0in
Total valleys	0ft 0in
Total hips	0ft 0in
Total ridges	40ft 0in
Total rakes	87ft 1in
Total wall flashing	13ft 11in
Total step flashing	0ft 0in
Total curb flashing	0ft 0in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	0ft 0in
Hips + ridges	40ft 0in
Eaves + rakes	153ft 2in

Pitch	2/12	4/12
Area (sqft)	121	696
Squares	1.3	7.0

Structure #2 summary

7704 154A Street Northwest. Edmonton. AB T5R 1V2

Pitched waste %	10%	12%	15%	Recommended 16%	17%	20%	22%
Pitched area (Sqft)	765	779	800	807	814	835	849
Squares	7.7	7.8	8.0	8.1	8.2	8.4	8.5


Flat waste %	0%	10%	12%	15%	17%	20%	22%
Flat area (Sqft)	121	134	136	140	142	146	148
Squares	1.3	1.4	1.4	1.4	1.5	1.5	1.5

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Report summary

7704 154A Street Northwest, Edmonton, AB T5R 1V2

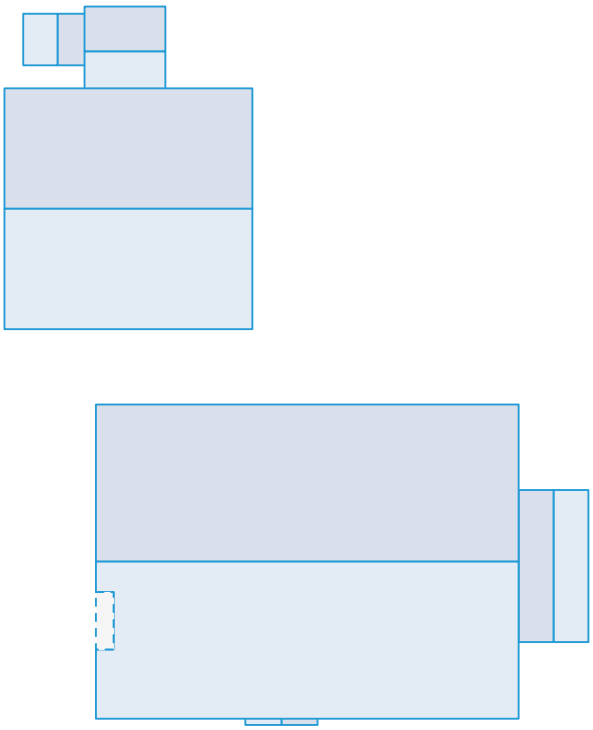

Measurements	
Total roof area	2487 sqft
Total pitched area	2366 sqft
Total flat area	121 sqft
Total roof facets	12 facets
Predominant pitch	4/12
Total eaves	174ft 1in
Total valleys	0ft 0in
Total hips	0ft 0in
Total ridges	102ft 0in
Total rakes	179ft 10in
Total wall flashing	33ft 7in
Total step flashing	14ft 4in
Total curb flashing	0ft 0in
Total transitions	0ft 0in
Total parapet wall	0ft 0in
Total unspecified	0ft 0in
Hips + ridges	102ft 0in
Eaves + rakes	353ft 11in

Pitch	2/12	4/12
Area (sqft)	121	2,367
Squares	1.3	23.7

Report summary

7704 154A Street Northwest. Edmonton. AB T5R 1V2

Pitched waste %	0%	Recommended 10%	12%	15%	17%	20%	22%
Pitched area (Sqft)	2,367	2,603	2,651	2,722	2,769	2,840	2,887
Squares	23.7	26.1	26.6	27.3	27.7	28.4	28.9

Flat waste %	0%	10%	12%	15%	17%	20%	22%
Flat area (Sqft)	121	134	136	140	142	146	148
Squares	1.3	1.4	1.4	1.4	1.5	1.5	1.5

Recommended waste is based on an asphalt shingle roof with a closed valley system (if applicable). Several other factors are involved in determining which waste percentage to use, including the complexity of the roof and individual roof application style. You will also need to calculate the post-waste quantity of other materials needed (hip and ridge caps, starter shingle, etc.).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.

Material calculations

7704 154A Street Northwest, Edmonton, AB T5R 1V2

Product	Unit	Waste (0%)	Waste (10%)	Waste (15%)	Waste (20%)
Shingle (total sqft)		2,367 sqft	2,603 sqft	2,722 sqft	2,840 sqft
IKO - Cambridge	bundle	72	79	82	86
CertainTeed - Landmark	bundle	73	80	83	87
GAF - Timberline	bundle	73	80	83	87
Owens Corning - Duration	bundle	73	80	83	87
Atlas - Pristine	bundle	72	79	83	87
Starter (eaves + rakes)		354 ft	390 ft	408 ft	425 ft
IKO - Leading Edge Plus	bundle	3	4	4	4
CertainTeed - SwiftStart	bundle	4	4	4	4
GAF - Pro-Start	bundle	3	4	4	4
Owens Corning - Starter Strip	bundle	4	4	4	5
Atlas - Pro-Cut	bundle	3	3	3	4
Ice and Water (eaves + valleys + flashings)		223 ft	245 ft	256 ft	267 ft
IKO - StormShield	roll	4	4	4	5
CertainTeed - WinterGuard	roll	4	4	4	5
GAF - WeatherWatch	roll	4	4	4	4
Owens Corning - WeatherLock	roll	3	4	4	4
Atlas - Weathermaster	roll	4	4	4	5
Synthetic (total sqft; no laps)		2,367 sqft	2,603 sqft	2,722 sqft	2,840 sqft
IKO - Stormtite	roll	3	3	3	3
CertainTeed - RoofRunner	roll	3	3	3	3
GAF - Deck-Armor	roll	3	3	3	3
Owens Corning - RhinoRoof	roll	3	3	3	3
Atlas - Summit	roll	3	3	3	3
Capping (hips + ridges)		103 ft	113 ft	118 ft	123 ft
IKO - Hip and Ridge	bundle	4	4	4	5
CertainTeed - Shadow Ridge	bundle	4	4	4	5
GAF - Seal-A-Ridge	bundle	5	5	5	5
Owens Corning - DecoRidge	bundle	6	6	6	7
Atlas - Pro-Cut H&R	bundle	4	4	4	4
Other					
8' Valley (no laps)	sheet	0	0	0	0
10' Drip Edge (eaves + rakes; no laps)	sheet	36	39	41	43

These calculations are estimates and are not guaranteed. Always double check calculations before ordering materials. Estimates are based off of the total pitched area (i.e., flat area is excluded).

This report was prepared by Roofr. Copyright © 2026 Roofr.com | All rights reserved.